Kako ispuniti polja

Prije početka

Pripremite XML izvoz iz programa za račune i upute kupca. Koristite UBL ili CII. PDF ispis ne zamjenjuje XML; izvezite elektronički račun iz programa.

Koraci

1. Otvorite validator e-računa i odaberite paket XRechnung.
2. Odaberite datoteku XRechnung (UBL ili CII) ili zalijepite XML.
3. Označite potvrdni okvir za privolu, zatim kliknite „Check invoice“.
4. Pročitajte karticu rezultata: pravilo, polje, XML putanja te neispravan i ispravan primjer.
5. Ispravite polje u svom programu, izvezite i provjerite ponovno.

Tri pogreške koje prvo treba provjeriti

- BR-DE-15: Nedostaje referenca kupca. Zatražite referencu za usmjeravanje od kupca i unesite je u BuyerReference.
- BR-DE-2: Nedostaje kontakt prodavatelja. Dodajte kontakt za račune u podatke prodavatelja i ponovno izvezite.
- BR-DE-21: Pogrešan identifikator specifikacije. Odaberite izvoz XRechnung u programu i provjerite novu datoteku.

Uspješna provjera potvrđuje odabrana pravila. Prije slanja potvrdite zahtjeve kupca za dostavu računa.

Jezik uputa može se razlikovati od jezika kontrola. Sačuvajte ID pravila kad tražite pomoć kolege.


XSDHub · XRechnung

XSDHub · XRechnung · video


Snimke zaslona

Zaslon: engleski. Svi prikazani primjeri računa su izmišljeni.

Unos i odabrana pravila

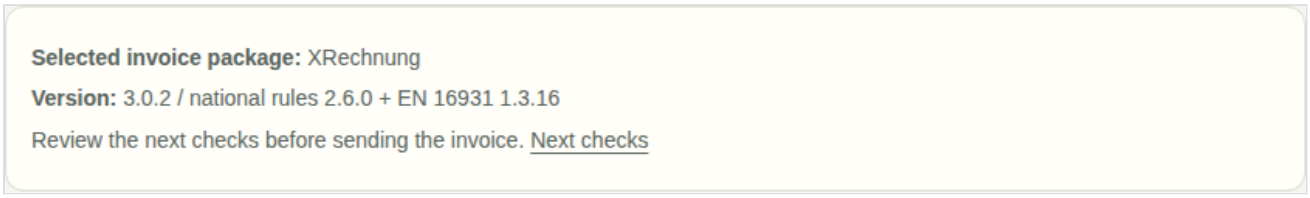

Unos i odabrana pravila

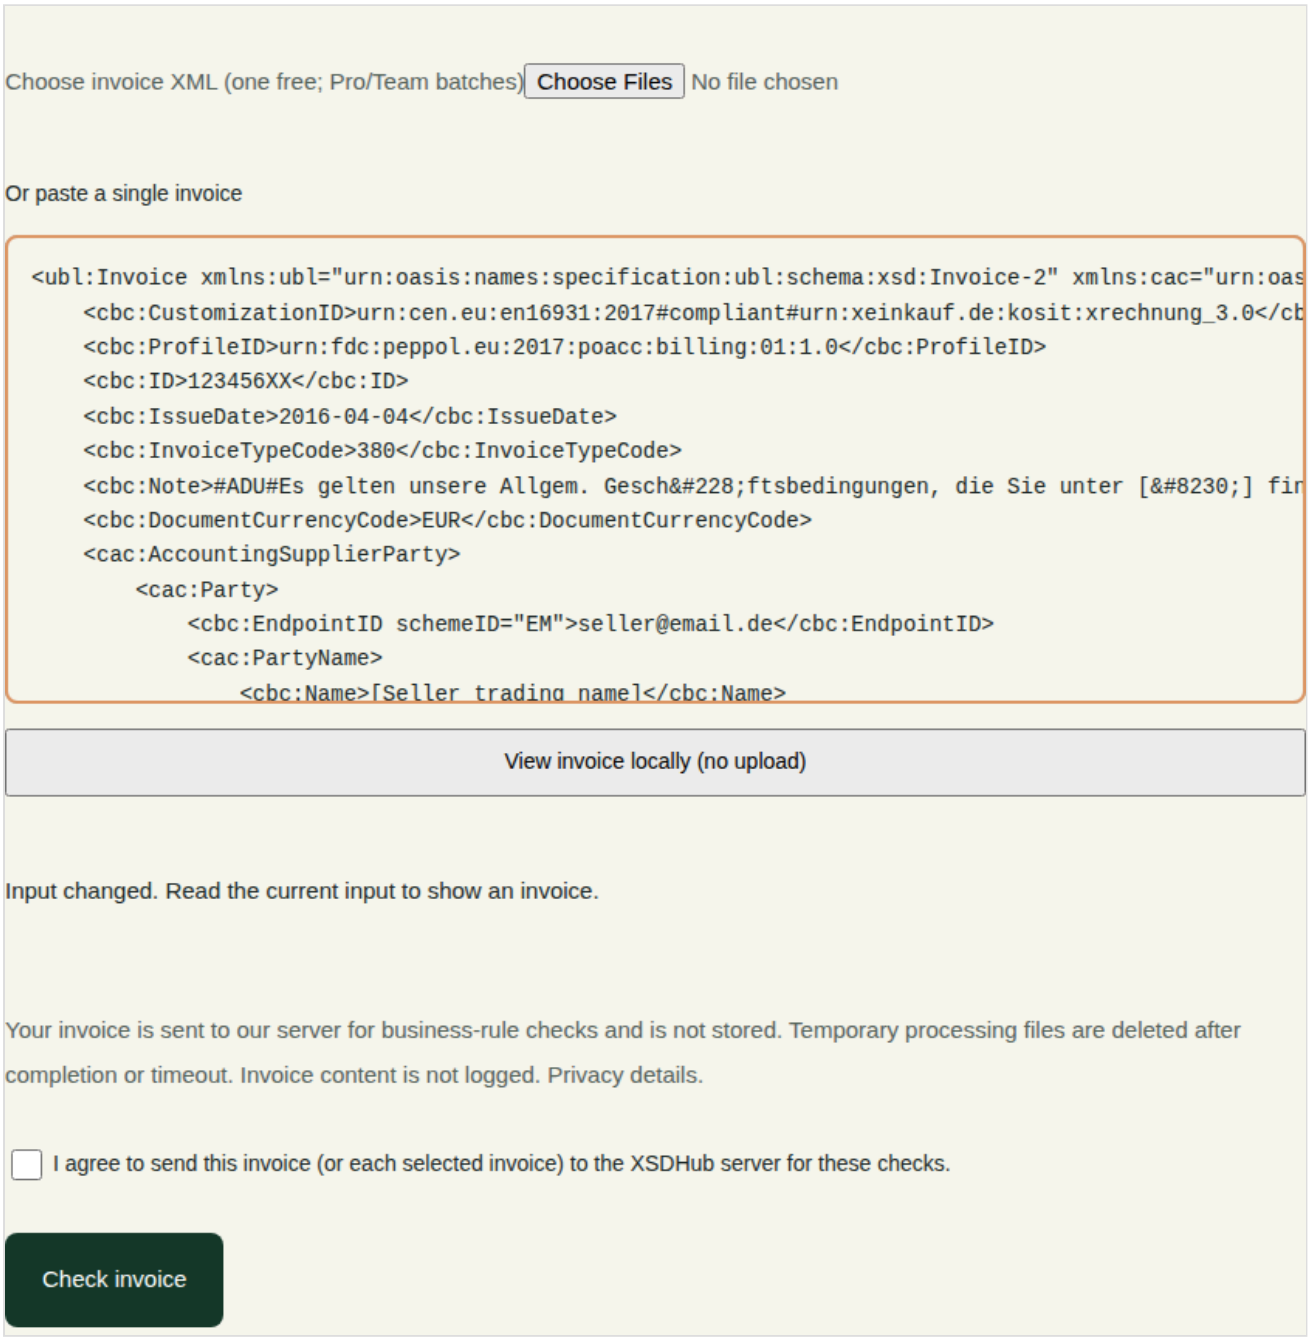

Rezultat: ID pravila, mjesto i ispravak

BR-DE-15 · Buyer reference is missing

The checked XRechnung rule requires a non-blank buyer reference (BT-10). Enter the reference provided by the recipient in the source system, then export and check again. The fictional value below is only a tested example; it is not a reference for your invoice.

Expected field path:

```
/Q{urn:oasis:names:specification:ubl:schema:xsd:Invoice-2}Invoice/Q{urn:oasis:names:specification:ubl:schema:xsd:CommonBasicComponents-2}BuyerReference
```

Engine code: BR-DE-15

Engine location:

```
/Q{urn:oasis:names:specification:ubl:schema:xsd:Invoice-2}Invoice[1]
```

Failing example

```
<!-- BuyerReference absent -->
```

Passing example

```
<cbc:BuyerReference xmlns:cbc="urn:oasis:names:specification:ubl:schema:xsd:CommonBasicComponents-2">FICTIONAL-REFERENCE</cbc:BuyerReference>
```

Tested UBL fixture: the complete failing and passing invoices differ only by this element. Place it after DocumentCurrencyCode in this example.

Open BR-DE-15 and the complete examples

▶ Original engine message